


drop line

DRIP TAPE
WITH LONG FLAT
DRIPPER



 **GREEN
IRRIGATION
SYSTEM** the rainmaker

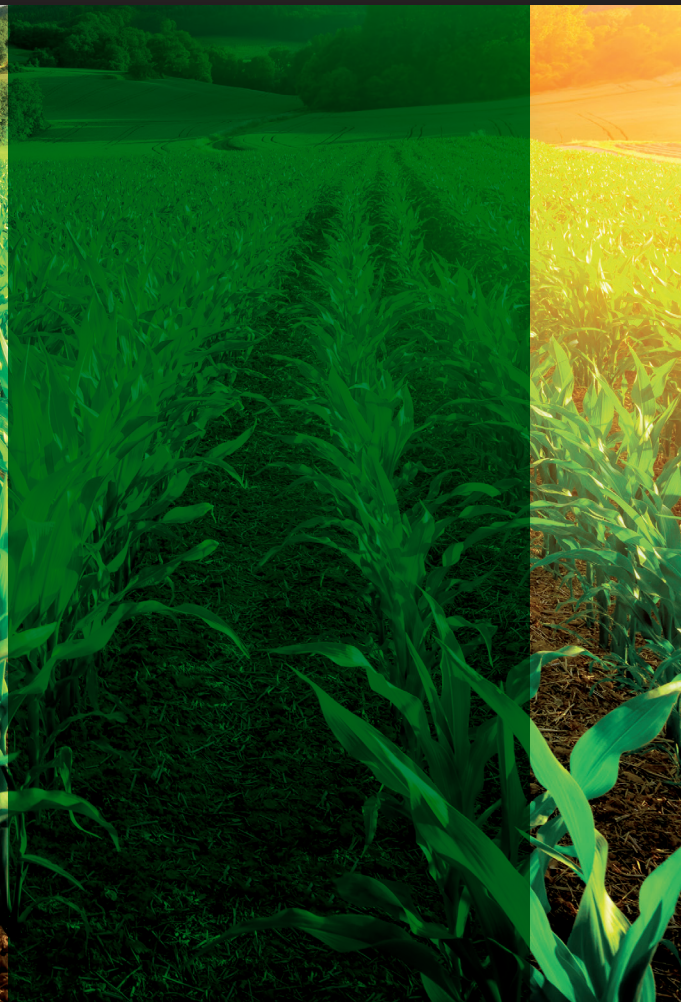

DROPLINE L is a drip line with long flat dripper, specifically designed for open-field and greenhouse irrigation. It is ideal for vegetable crops such as watermelons, melons, strawberries, zucchini, peppers, eggplants, potatoes, cucumbers, and onions, as well as for flower cultivation like gerberas, roses, and carnations. The innovative dripper features a dual protection system that ensures excellent resistance to clogging.

TECHNICAL SPECIFICATIONS	DIAMETER 16 mm / 22 mm / 29 mm				
Nominal diameter	16,1 mm / 22,0 mm / 29,0 mm				
Thickness	8 mil 0,20 mm	10 mil 0,25 mm	12 mil 0,30 mm	15 mil 0,38 mm	18 mil 0,45 mm
Max working pressure D/16*	1,00 bar	1,20 bar	1,40 bar	1,60 bar	1,80 bar
Max working pressure D/22*	0,90 bar	1,10 bar	1,30 bar	1,50 bar	1,70 bar
Max working pressure D/29*	-	1,10 bar	1,30 bar	-	-
Nominal flow rate (1,0 bar)	0,80 - 1,10 - 1,30 - 1,45 - 1,60 - 2,10 - 3,80 l/h				
Dripper spacing	15 ÷ 100 cm				
Coil length D/16°	2500 m	2200 m	1700 m	1200 m	1000 m
Coil length D/22°	1800 m	1500 m	1200 m	900 m	800 m
Coil length D/29	-	1200 m	1000 m	-	-

*For a duration of approximately 30 minutes with open ends

FEATURES AND BENEFITS

Drip tape made of black polyethylene with double light blue stripes to indicate correct upward installation on the ground

Surface or slightly underground installation

Low pressure losses and uniform water distribution over long distances

Integrated filters that prevent particles from entering the dripper, reducing the risk of clogging

High resistance to clogging, UV rays, agricultural chemicals, and acids

Warranty from 1 to 3 years depending on the thickness

Dripline compliant with UNI EN ISO 9261 standards

